

Version 1.07

(08.12.2017)

Installation Instructions

Complete set Active Sound incl. Soundbooster Audi Q7 4L



Contents

Liability Exclusion	2
Copy Right	3
General Notes	3
Safety Instructions	4
Requirements for the determinable operation	4
Notes.....	5
Assembly Instructions.....	6
Software	17

Liability Exclusion

Dear Customer,

our cable sets are developed according to the connection- and circuit diagrams of the corresponding car manufacturer. Before the original production the cable sets will be tested on an original car. Therefore, the integration into the car electronics will be executed according to the instructions of the manufacturer. Regarding the necessary pre-understanding and the accuracy of the presentation of texts and pictures our mounting guidelines correspond to the usual ones in car technology and car electronics. Practically, they have been proved one's worth a hundred times.

However, should there be any difficulties during the installation of our products we will be at your disposal any time for support by phone or by mail. Moreover, we offer you to execute the installation at our works in Bad Segeberg.

Costs which may arise because a third person will execute the installation of our products will not be supported by us in any case. Only if there is a mistake caused by our product we will pay the proved costs of the installation as well as the costs of the removal of the defective product. The refund of expenses will be limited to gross EUR 110,- ; we reserve the right to check the described mistake in our works in Bad Segeberg. In case of a proved reclamation the costs for dispatch for the check in our factory will be transferred to you.

According to our experience each specific factory which has the necessary diagnostic device, diagnostic software and the circuit diagrams of the manufacturer can find possible mistakes at our products within a short time. So the installation and removal including diagnostic inspection can be realised in at most 60 minutes.

We also made the experience that many specific factories cannot work with the circuit diagrams of the manufacturer, and that they cannot read usual wiring diagrams. Therefore, very easy installation works will take many hours. You will understand that we neither take the risk to find a reliable specific factory nor the financing of the training of the staff of your favoured factory.

Costs which will arise because you buy missing parts or spare parts at other suppliers will be refunded by us up to the amount of the costs which had been arisen by additional supply (saved expenses). In this case, there would be no right for refund according to the legal guarantee right as long as we have no deadline for supplementary performance or a deadline for supplementary performance has not expired.

So if you have any problems with the installation or operation of one of our products please call us, send us an email, send us the product or take your car to our factory in Bad Segeberg. We are sure to find an appropriate solution for each concern.

With best regards

Your Kufatec GmbH & Co. KG Team

Copy Right

Our installation- and removal instructions, installation plans, software and other documentation with texts or pictures are protected by copy right.

A publication or distribution of these documents is only permitted with a written approval of Kufatec GmbH & Co. KG.

General Notes

Regarding the development there has especially been paid attention to your personal safety together with the most possible operating comfort, modern design and actual product technologies.

Despite most possible accuracy in case of incorrect installation or use or in case of incorrect operating, it is possible that injuries or damages of property may arise.

Therefore, please read the operating instructions you have received carefully and completely, and keep it with you.

All articles of our production will be checked at 100% --- for your safety.

We reserve the right to make technical changes which serve the progress at any time.

Before the installation or startup it may be necessary, depending on the article and purpose of use, to check the legal instructions of each country.

In case of warranty claim the device has to be sent to the seller originally packed together with the sales receipt and a detailed description of the mistake. Please consider the manufacturer's instructions for return (RMA). The legal warranty instructions are valid.

The warranty claim and also the permission for startup will expire in case of:

- a) unauthorised changes on the device or the accessories which have not been executed or approved by the manufacturer or its partners
- b) opening of the box
- c) repair of the device on your own
- d) incorrect use / no normal use / startup
- e) influence of force on the device (falling down, wilful damage, accident, etc.)

During the installation please consider all safety and legal instructions.

The device may only be installed by trained qualified personnel or persons who are similar qualified.

In case of installation- or function problems please reduce the search of the mistake to approx. 0,5 hours for mechanical works or 1,0 hours for electronic works.

To avoid unnecessary additional work and expenses, please send immediately an inquiry to our technical support with the Kufatec contact form (<http://www.kufatec.de/shop/de/infocenter/>).

Please absolutely mention the following:

- car chassis number
- part number of the add-on kit
- exact description of the problem
- work steps already made

Safety Instructions

The installation may only be executed by trained qualified personnel. Please execute the installations only in a condition of dead voltage. Here please separate for example the battery from the main power supply and consider the instructions of the car manufacturer.

- *In order to not endanger your own driving safety please never use security relevant screws, bolts or other fixation pieces at steering, brake system or other components.*
- *Connect the device only at 12V wiring system voltage with ground connection to the autobody. This assembly is not allowed for the use in trucks or other cars with 24V wiring system voltage.*
- *Please avoid the installation of the device at positions where the driving safety or the functional efficiency of other subassembly integrated in the car are restricted.*
- *This module may only be used together with the following mentioned car types and models; the installation may be executed exclusively by use of the circuit points mentioned in the assembly instructions.*
- *Kufatec GmbH & Co. KG does not assume liability for damages which are caused by incorrect installation, the use of inapplicable circuit points or the installation into car types and -modules which are not foreseen.*
- *We would like to draw your attention to the fact that the module processes the data of the MOST-protocol of the car mentioned below. Therefore, during the installation of the module it will be used a model-specific complete system which we as the manufacturer of the mentioned construction line only know partly.*
- *Especially in case of changes within the same model line and the same year we therefore cannot guarantee the applicability of our construction line in each case. Kufatec GmbH & Co. KG does not assume liability for the applicability of our construction line with changes made by the manufacturer.*
- *Kufatec GmbH & Co. KG does not assume liability that the installation of the here described component has been permitted according to the guarantee instructions of particular car manufacturers. Therefore, please consider the guidelines for installation and guarantee conditions of your car manufacturer before installation.*
- *The manufacturer reserves the right to change components without giving reasons.*
- *Subject to errors and changes.*

Requirements for the determinable operation

Please use the device only in its the corresponding area.

In case of unprofessional and untypical use, installation or modification the permission for operation and the warranty claim will expire.


Notes

Note: The use of a sound booster is not permitted without registration in the vehicle papers, in the area of the german StVZO. The noise emission of the vehicle is increased by this retrofit. The regulations of the StVZO must be observed. It is therefore recommended to ask for a specific registration option at the responsible TÜV/DEKRA office before retrofitting. Outside Germany, please observe the laws on vehicle licensing applicable in your country.

Note: Make sure that there's enough space at the described position. If there is no space, please cancel the installation and contact our technical support.

Assembly Instructions

The following illustration shows the cable routing as well as the position of the individual components.

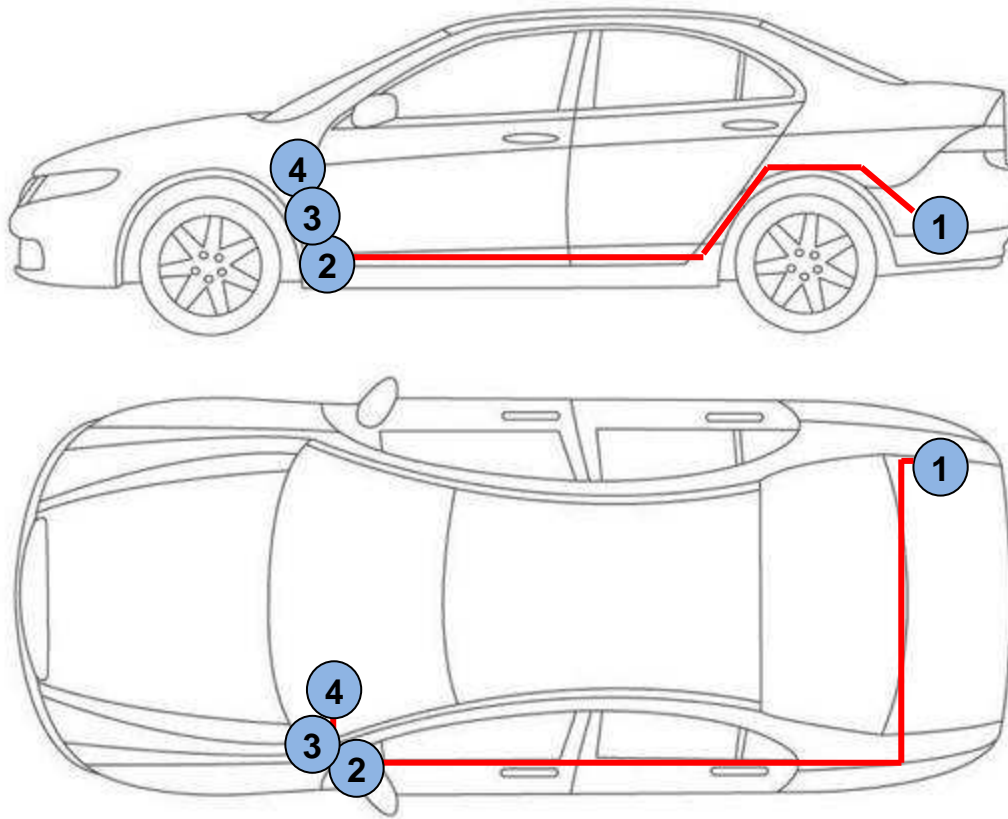

Scheme

- 1 – External sound generator incl. bracket**
- 2 – Control unit**
- 3 – Sound Booster Pro-module**
- 4 – Pushbutton**

First, remove the covering of the fuse box (fig. 1 and 2).



Figure 1



Figure 2

Then remove the lower trim panel of the dashboard on the driver's side, fig. 3 and 4.

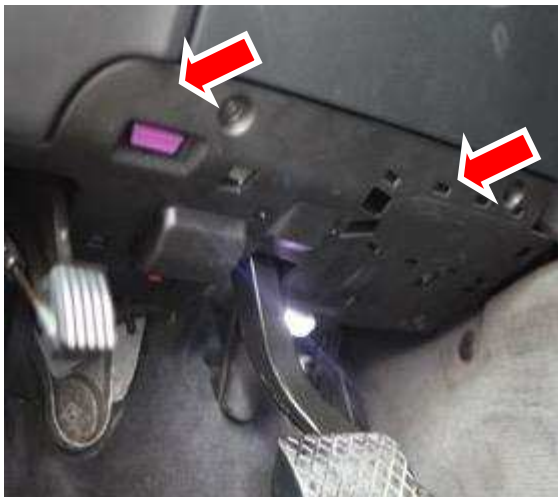


Figure 3



Figure 4

Now remove the lever of the hood release, for this, you have to pull the locking clip out of the guiding of the lever and remove the trim panel of the a-pillar, fig. 5 and 6.



Figure 5



Figure 6

Remove the front sill trim of the driver's side (fig. 7) and loosen the rear sill trim, fig. 8.

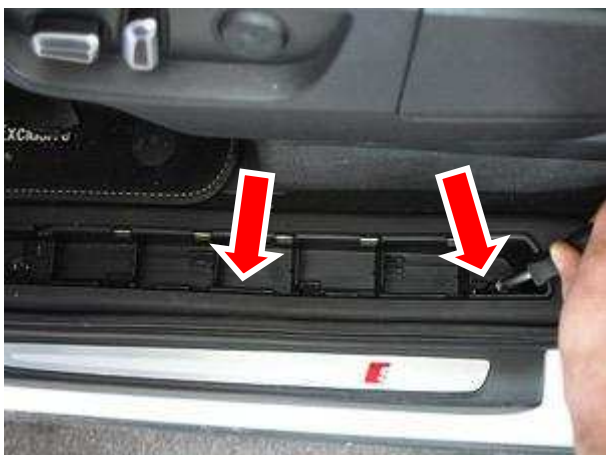


Figure 7



Figure 8

Attach the control units with suitable workshop material in the area of the a-pillar in the driver's footwell, fig. 9. Now route the wires for CAN High and CAN Low to the control unit for the automatic self-leveling headlamp system. The control unit is located behind the already removed trim panel below the dashboard, fig. 10.

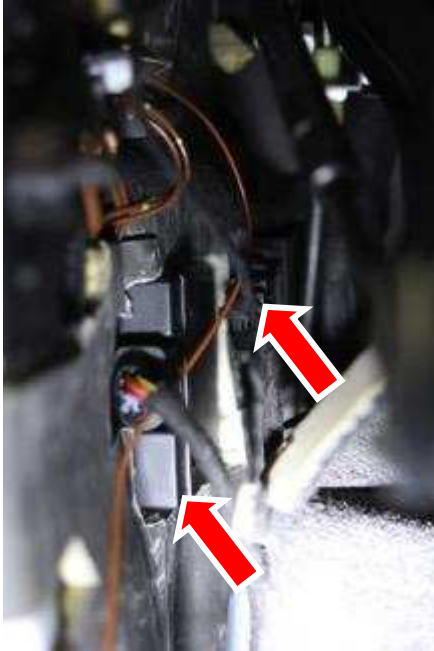


Figure 9

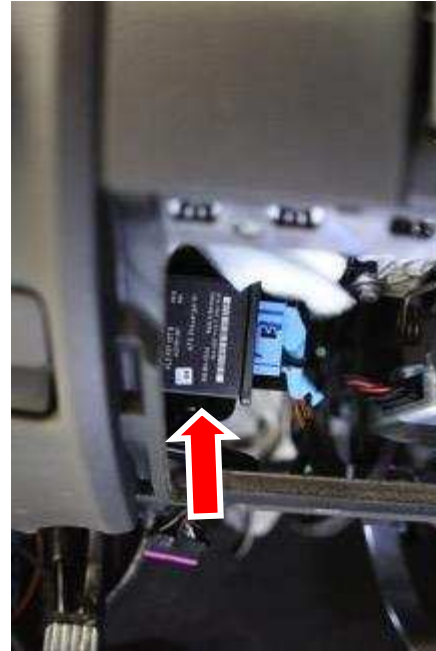


Figure 10

In the next step, connect the twisted wires of the cable set to the respective wire of the plug according to the wire's inscription or the cable colour, fig. 11. For this, remove the plug housing, so you can see the markings or rather numbering of the plug, fig. 12.

- | | | |
|-------------------------------|---|----------------------------------|
| CAN High (black/white) | - | PIN 2 (orange/black wire) |
| CAN Low (black/yellow) | - | PIN 3 (orange/brown wire) |

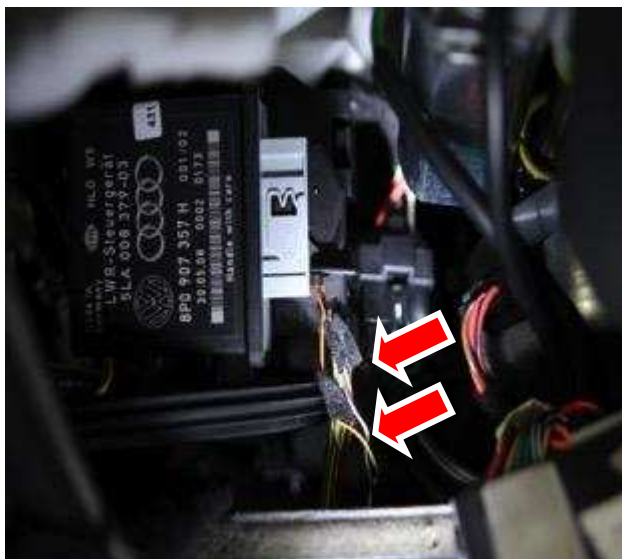


Figure 11

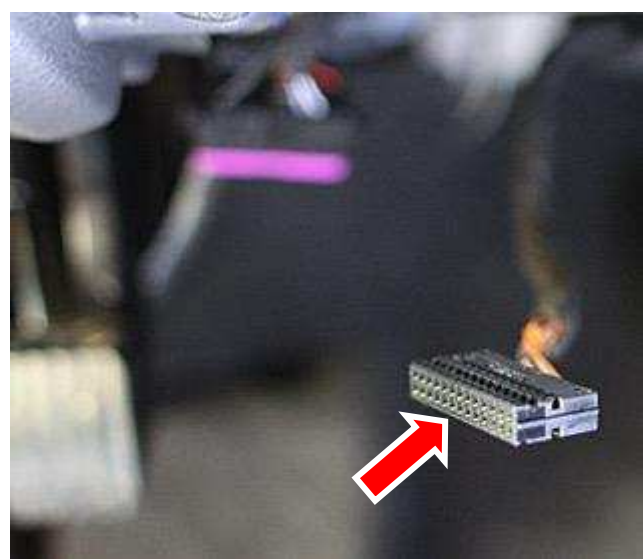


Figure 12

Now the connection to the fuse box. Search for a free fuse spot, which carries **ignition plus (clamp 15)**, in the lower fuse carrier using a suitable instrument of measure. If you have found a spot, unlock the fuse carrier (fig. 13) and place the ignition lead wire (red/white) of the cable set with the right inscription in from behind. Afterwards protect the fuse spot with a **7,5A** fuse, fig. 14.



Figure 13



Figure 14

Connect the ground cable (brown) to the ground spot. It is located at the a-pillar below the dashboard, fig. 15 and 16.



Figure 15

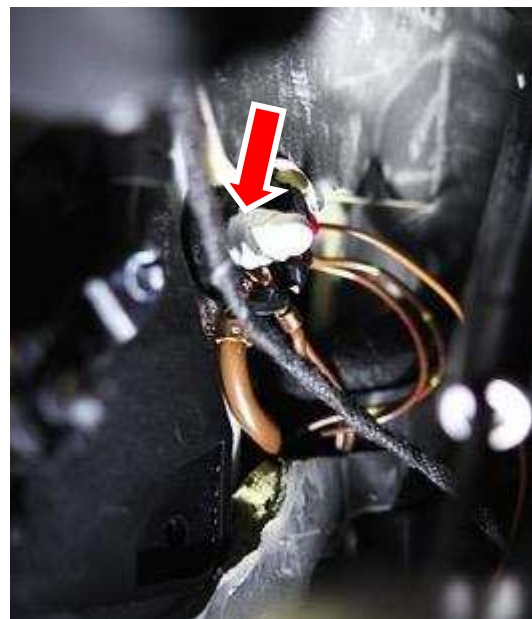


Figure 16

Finally, you have to install the pushbutton for the switch of the sound profiles, e.g. at the lower trim panel of the dashboard in the driver's footwell, fig. 17.

Attention: For the drilling, a 7mm drill is necessary!



Figure 17

Now loosen the trim panel of the b-pillar (fig. 18) and remove the trim panel of the c-pillar, fig. 19.



Figure 18



Figure 19

Then loosen the trim panel on the left in the trunk (fig. 20) and remove also the trim panel of the left d-pillar, fig. 21.



Figure 20



Figure 21

Take the trunk floor out (fig. 22) as well as the covering on the right, fig. 23.



Figure 22



Figure 23

Begin the cable routing and guide the connecting cable for the sound generator behind the trim panel of the a-pillar as well as along the sill trim to the trim panel of the b-pillar. Pull the connecting cable behind the trim panel of the b-pillar rearwards.



Figure 24



Figure 25

Afterwards route the connecting cable under the sill trim and over the wheel housing behind the left side trim panel of the trunk. Pull the cable further through and guide it under the trim panel into the trunk. (Figure 26, 27 & 28)



Figure 26



Figure 27



Figure 28

Route the connecting cable for the external sound generator along the original cable harness to the right side of the trunk. Now guide the connecting cable through the grommet to the underbody.

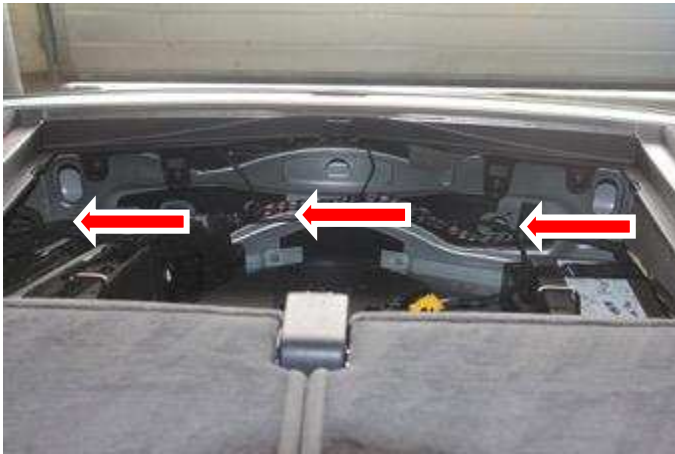


Figure 29



Figure 30



Figure 31

Remove the right rear wheel.



Figure 32

Remove the interior trim of the wheel housing by loosening all marked screws.



Figure 33



Figure 34



Figure 35



Figure 36

Now loosen the screw that is marked in figure 37 and pull the marked connecting cable through the grommet and waterproof the grommet afterwards.



Figure 37



Figure 38

Attach the sound generator at the marked positions and connect the connecting cable to the sound generator. Attach the steel wire rope to the sound generator and to a suitable position at the vehicle.



Figure 39



Figure 40

Please use for the fixation of the Sound Booster suitable high tensile screws. In order to avoid loosening of the screws by vibration please make the screws safe with appropriate factory material e.g. threadlock. Please additionally check the stability of the Sound Booster regularly and if necessary retighten the screws.


In case of no consideration we do not assume liability for possible damages.

As additional safety the delivered steel cable and the retaining clips have to be tightened on the Sound Booster as well as at a suitable position in the car. This safety cable is an additional security should the tightening screws should be released by vibration.

The reassembly is made in reversed order. See to a can bus sleep mode of at least 10 minutes (lock vehicle). Thereafter the installation is completed.

You can switch the sound profiles with the pushbutton. You can choose between 6 sound profiles. In profile 1-3 you hear a restrained sound, in profile 4-6 it's a powerful V6/V8 sound.

Software

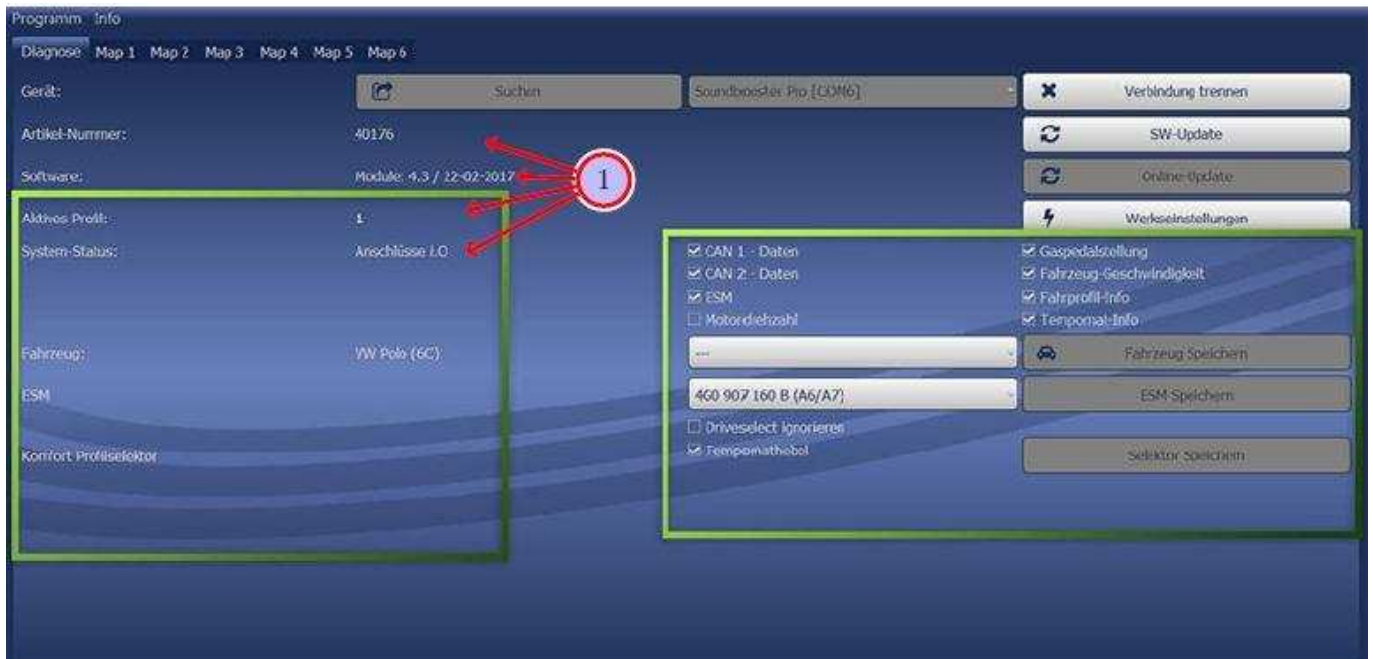

If the system does not work after you have installed everything, please check by having a look on to the following Link: <https://www.sound-booster.com/en/debugging.html> if everything is correct as described. For the further commissioning or debugging, our Sound Booster Software for PC / Mac should be used:

Step 1: Download the appropriate software via the following link: <https://www.sound-booster.com>.

Step 2: Turn the ignition of the vehicle on and only then connect the PC / Mac with a USB-cable with our module. It is important here to make sure previously that plus and minus are connected correctly. If this is not the case, a damage at the computer or at the control unit can result.


Step 3: Start the downloaded software and first click on search and afterwards on connect. You will be forwarded automatically to the diagnosis side, on which you can see the following things at a glance:

Software: Software version / creation date

Active profile: The actually activated profile is indicated here.

Vehicle: The automatically identified vehicle is indicated here.

System Status: You can see here, if the connections are correct.

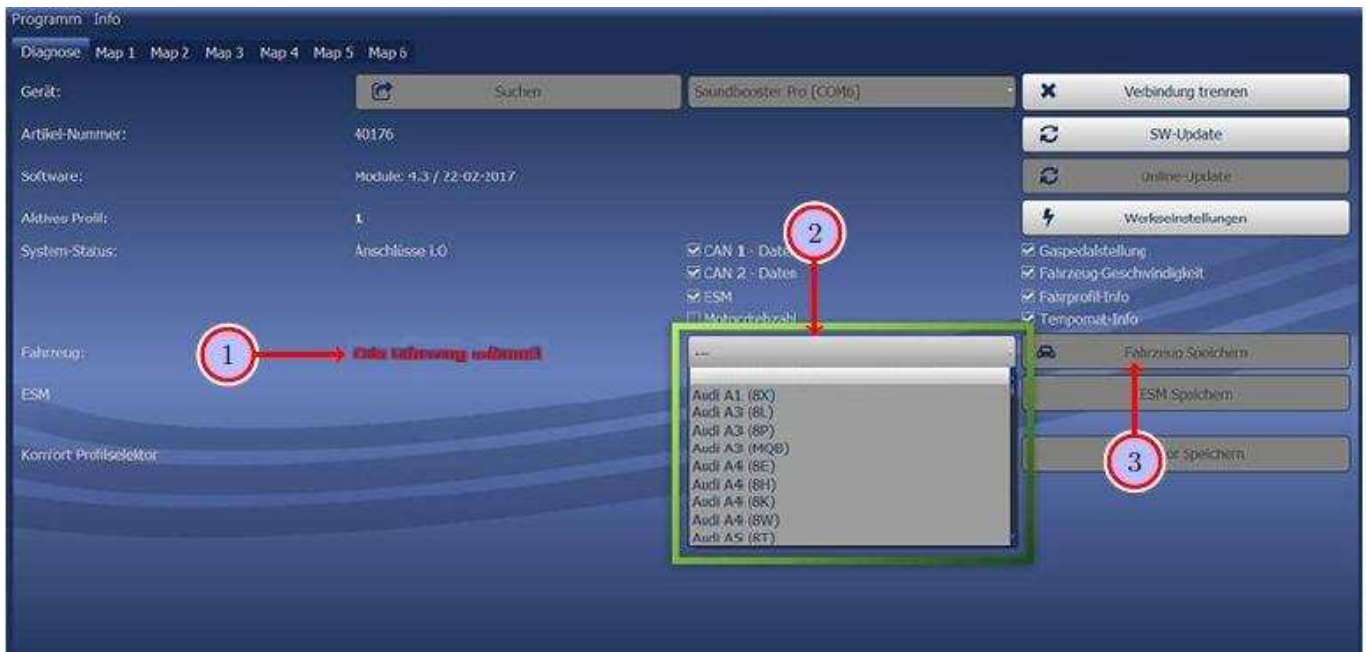


If no current vehicle is identified (see point 1), you have to select the vehicle via the Manual Selection as follows:

Open the dropdown-menu (see point 2), search for your vehicle and select it.

Click on Save Car to save the vehicle on the module permanently.

If you don't find your vehicle in this list, it is possibly that the software has to be adapted to your vehicle. For this, please contact us via e-mail: info@kufatec.de or by phone: +49 (0) 4551 / 80 810 888. We will make an appointment with you, at which we will adapt the software to your vehicle by Team Viewer (telemaintenance).

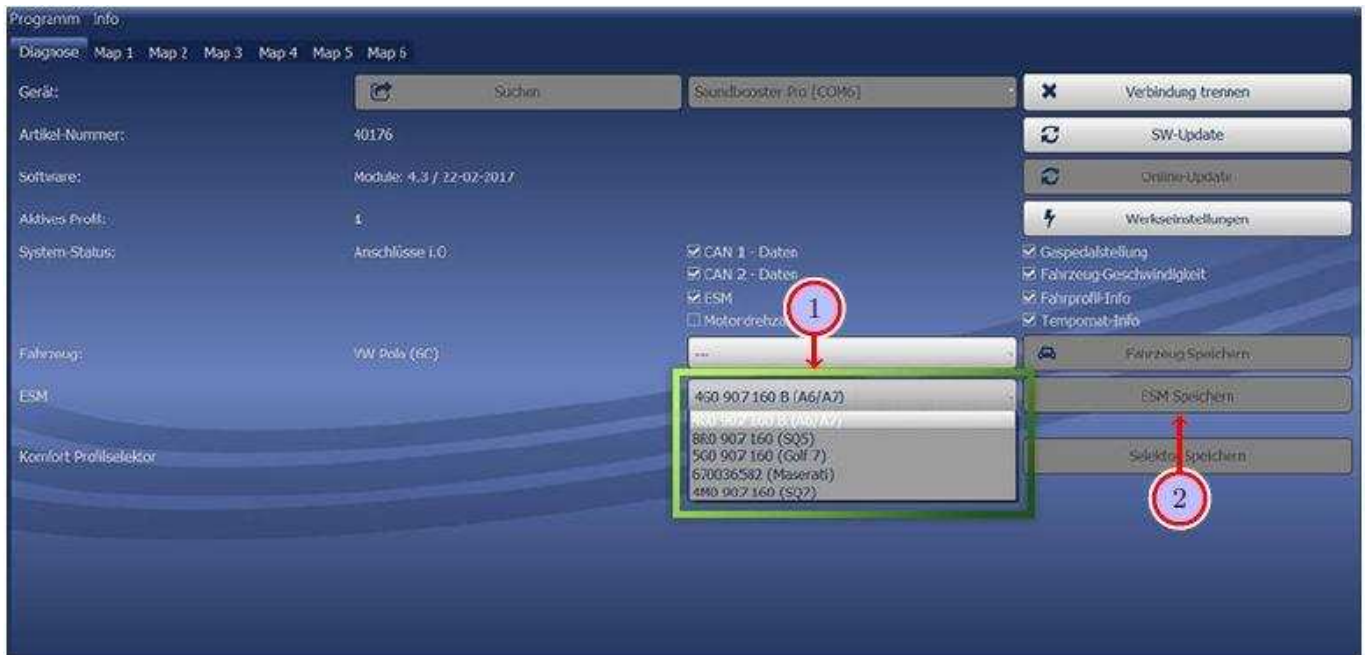

You also need to check if the right ESM is selected in our software:

Open the dropdown-menu (see point 1), search for the correct ESM and select it.

Click on Save ESM to save the ESM on the module permanently.

If you, for example, has ordered a complete set with Audi control unit you need to choose as ESM 4G0 907 160 B (A6/A7). If you install the Maserati Control unit you need to choose the ESM 670036582 (Maserati)
 If the system does not work after all please get in contact with us via e-mail: info@kufatec.de or by phone: +49 (0) 4551 / 80 810 888. We will check the issue as soon as possible.